

# LED TEMPORARY WORK LIGHT

## LED TEMPORARY WORK LIGHT

Outstanding lighting quality  
 Convenient & professional  
 No fan Passive cooling solution  
 360 degree Beam Angle lighting  
 Energy saving, long lifespan

### Features


150W available  
 Efficient heat dissipation  
 Plug-n-Play design  
 On-off controller  
 ETL Approved  
 150LM/W SMD2835 Chips  
 5 years warranty  
 AC100~277V,50~60Hz  
 360 degree Beam Angle  
 6KV high voltage surge protection  
 Suitable for dry and damp locations  
 Hollow heatsink increase air flow  
 No magnetic disturbance driver design



wire cord: 10ft



On-off controller




Hollow heatsink  
 increase air flow

### Applications


LED Temporary Work Light series can be widely used in warehouses, wharf, factories and workshops, highway toll stations, gas stations, mine, etc.

Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
TWL-60W	8700LM 8,700 lumens	3 pin wires	360 degree	Input Voltage 100-277V 50~60Hz  Power Factor(%) >90	SMD2835 chips	WW 2800~3000 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	80 80 CRI
TWL-80W	11600LM 11,600 lumens	3 pin wires					
TWL-100W	14500LM 14,500 lumens	3 pin wires					
TWL-125W	18125LM 18,125 lumens	3 pin wires					
TWL-150W	21750LM 21,750 lumens	3 pin wires					


**DIMENSIONS**

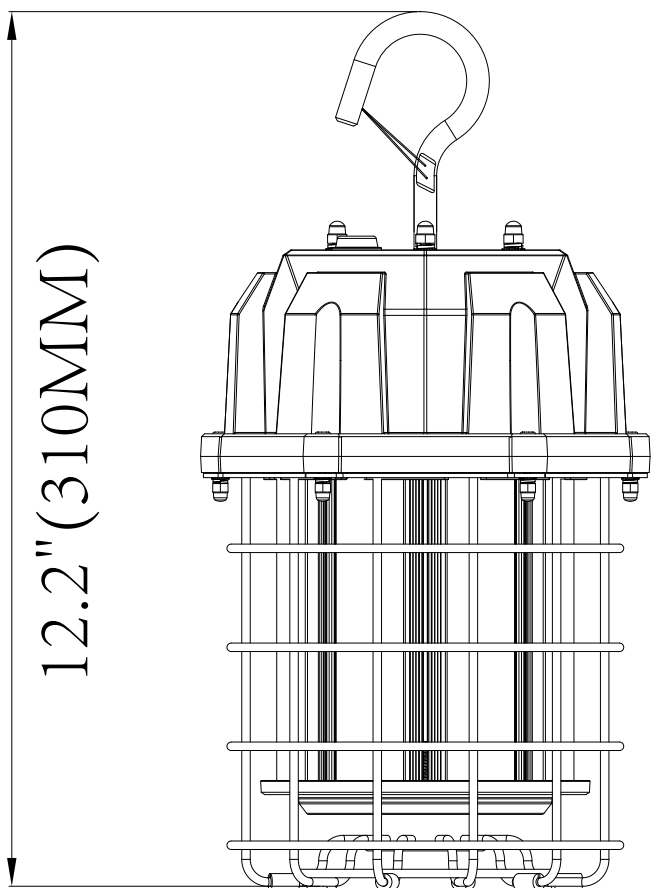

**60W,80W**

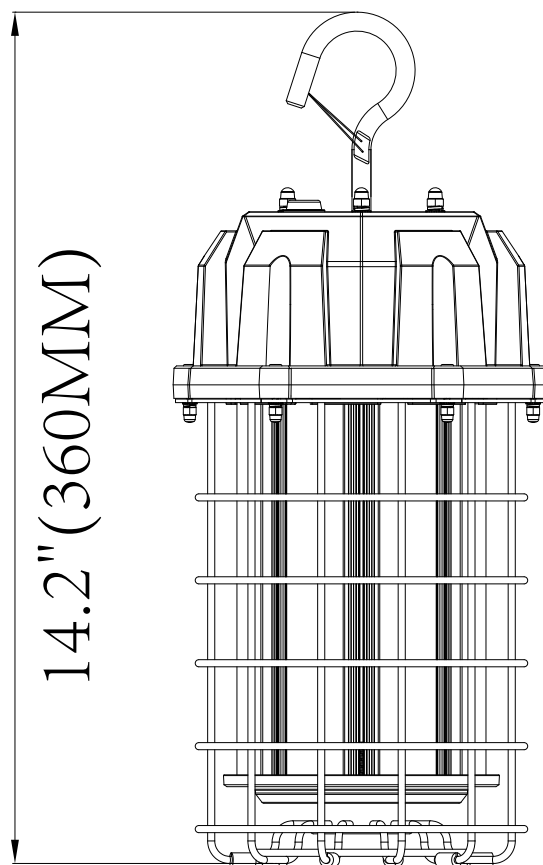


**100W,125W,150W**

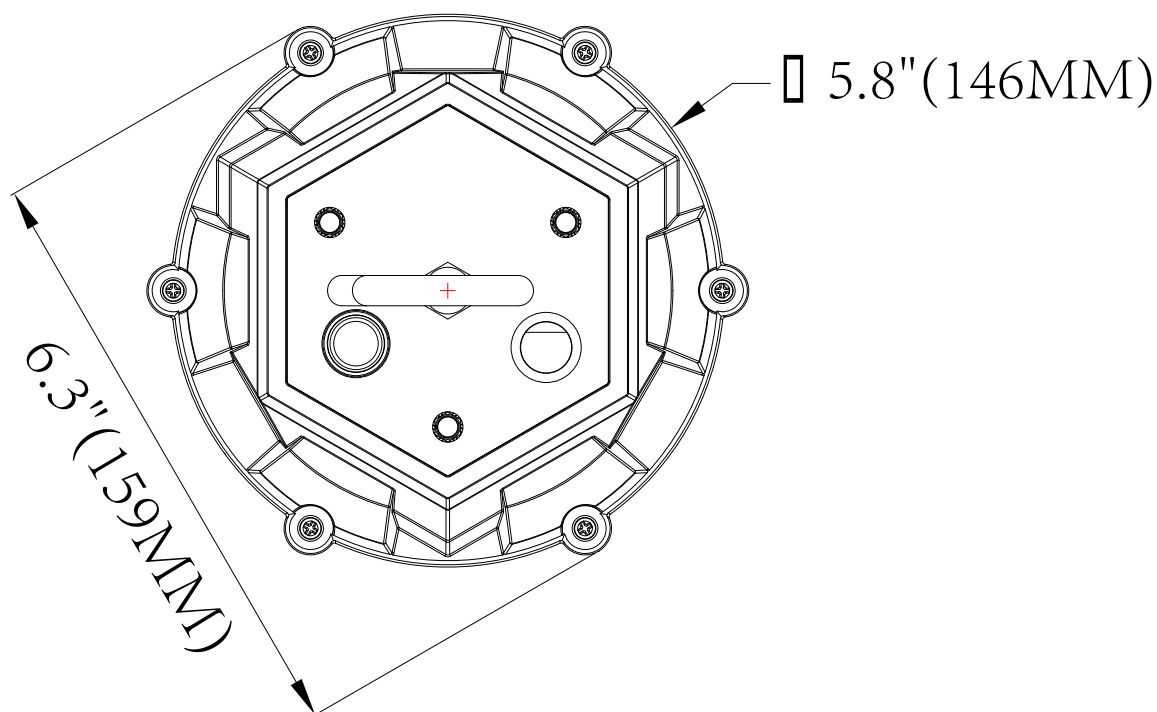

**60W,80W,100W,120W,150W**

## Light Source Test Report

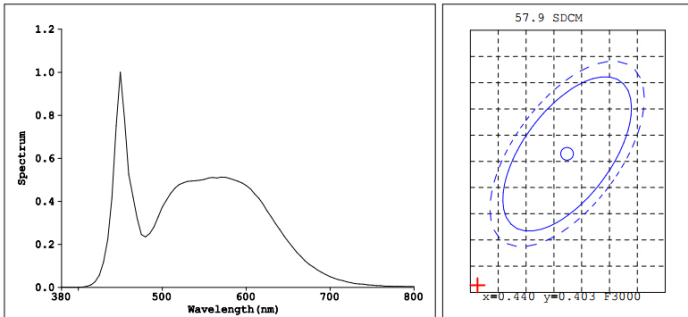

### Color Parameters:

Chromaticity Coordinate:  $x=0.3281$  ( $dx=-0.0002$ )  $y=0.3504$  ( $dy=0.0129$ )  
 Chromaticity Coordinate:  $u'=0.2004$   $v'=0.4816$  ( $duv=6.67e-03$ )  
 Tc=5687K Dominant WL:Ld=535.4nm Purity=3.8% Centroid WL:546.0nm  
 Ratio:R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.0nm  
 Render Index:Ra=82.7  
 R1 =80 R2 =87 R3 =93 R4 =83 R5 =81 R6 =83 R7 =88  
 R8 =67 R9 =2 R10=70 R11=82 R12=59 R13=82 R14=96 R15=74

### Photo Parameters:

Flux: 8718 lm Fe: 23.152 W Efficacy:145.7 lm/W  
 WHITE:ANSI\_5700K


### Electrical Parameters:

Lamp : U=223.7V I=0.2280A P=59.90W PF=0.9800

Instrument Status:  
 Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=13246(G=3,D=54)  
 REF=14279(R=3) #=0.741% PMT: 27.0 centigrade [26.7]

# 60W

## Light Source Test Report

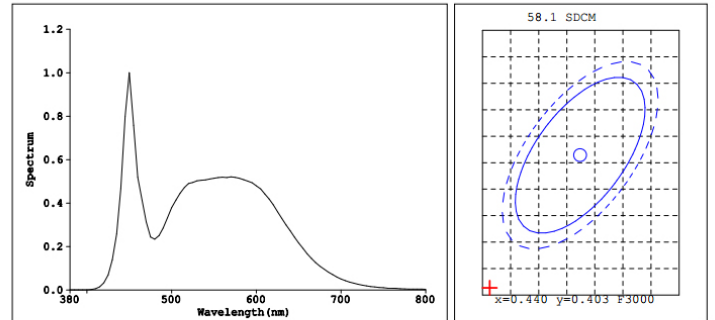

### Color Parameters:

Chromaticity Coordinate:  $x=0.3275$  ( $dx=-0.0003$ )  $y=0.3498$  ( $dy=0.0128$ )  
 Chromaticity Coordinate:  $u'=0.2002$   $v'=0.4812$  ( $duv=6.61e-03$ )  
 Tc=5712K Dominant WL:Ld=531.8nm Purity=3.5% Centroid WL:545.0nm  
 Ratio:R=15.3% G=80.1% B=4.5% Peak WL:Lp=450.0nm HWL:20.4nm  
 Render Index:Ra=82.5  
 R1 =80 R2 =86 R3 =92 R4 =83 R5 =81 R6 =82 R7 =88  
 R8 =67 R9 =1 R10=69 R11=82 R12=60 R13=81 R14=96 R15=74

### Photo Parameters:

Flux: 10005.76 lm Fe: 34.811 W Efficacy:130.16 lm/W  
 WHITE:ANSI\_5700K


### Electrical Parameters:

Lamp : U=224.0V I=0.3720A P=79.30W PF=0.9520

Instrument Status:  
 Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=19520(G=3,D=55)  
 REF=21395(R=3) #=-0.479% PMT: 27.0 centigrade [26.6]

# 80W

## Light Source Test Report

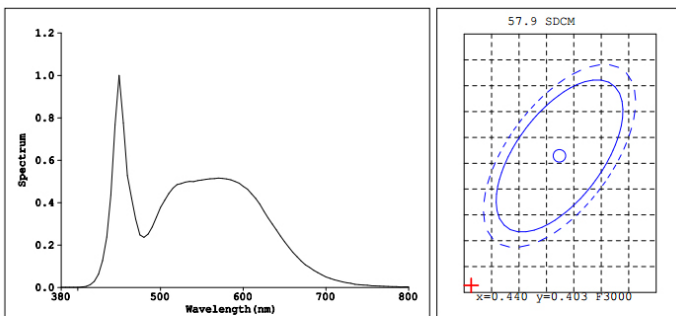

### Color Parameters:

Chromaticity Coordinate:  $x=0.3280$  ( $dx=-0.0003$ )  $y=0.3500$  ( $dy=0.0125$ )  
 Chromaticity Coordinate:  $u'=0.2005$   $v'=0.4814$  ( $duv=6.44e-03$ )  
 Tc=5687K Dominant WL:Ld=534.6nm Purity=3.7% Centroid WL:546.0nm  
 Ratio:R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.3nm  
 Render Index:Ra=82.9  
 R1 =80 R2 =87 R3 =92 R4 =83 R5 =82 R6 =83 R7 =88  
 R8 =67 R9 =2 R10=70 R11=83 R12=60 R13=82 R14=96 R15=74

### Photo Parameters:

Flux: 12596.1 lm Fe: 41.041 W Efficacy:133.82 lm/W  
 WHITE:ANSI\_5700K


### Electrical Parameters:

Lamp : U=221.4V I=0.4230A P=90.50W PF=0.9620

Instrument Status:  
 Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=23115(G=3,D=55)  
 REF=25211(R=3) #=0.667% PMT: 26.9 centigrade [26.8]

# 100W

## Light Source Test Report

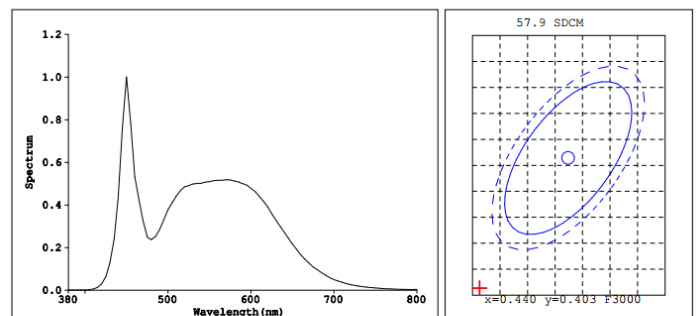

### Color Parameters:

Chromaticity Coordinate:  $x=0.3279$  ( $dx=-0.0003$ )  $y=0.3500$  ( $dy=0.0125$ )  
 Chromaticity Coordinate:  $u'=0.2004$   $v'=0.4813$  ( $duv=6.53e-03$ )  
 Tc=5696K Dominant WL:Ld=533.9nm Purity=3.7% Centroid WL:546.0nm  
 Ratio:R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.5nm  
 Render Index:Ra=82.7  
 R1 =80 R2 =87 R3 =92 R4 =83 R5 =81 R6 =83 R7 =88  
 R8 =67 R9 =2 R10=70 R11=82 R12=60 R13=82 R14=96 R15=74

### Photo Parameters:

Flux: 15741.9 lm Fe: 52.703 W Efficacy:133.48 lm/W  
 WHITE:ANSI\_5700K



### Electrical Parameters:

Lamp : U=222.6V I=0.5440A P=117.7W PF=0.9710

Instrument Status:  
 Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=29682(G=3,D=55)  
 REF=32343(R=3) #=0.698% PMT: 26.8 centigrade [26.6]

# 125W

Light Source Test Report

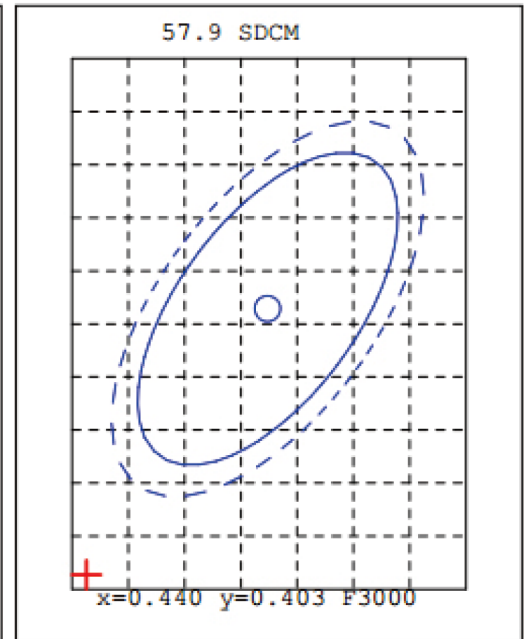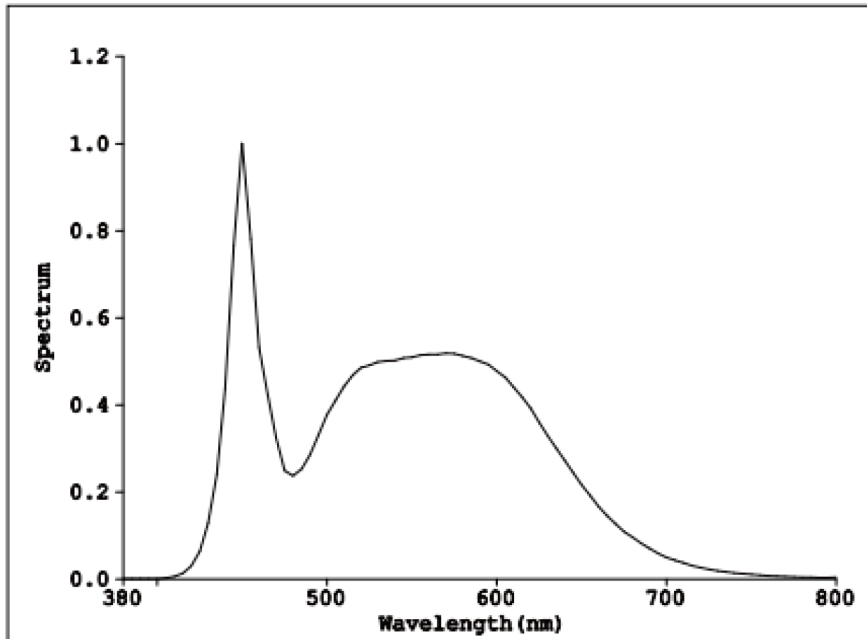

Color Parameters:

Chromaticity Coordinate:  $x=0.3279$  ( $dx=-0.0003$ )  $y=0.3500$  ( $dy=0.0125$ )

Chromaticity Coordinate:  $u'=0.2004$   $v'=0.4813$  ( $duv=6.53e-03$ )

$T_c=5696K$  Dominant WL:  $L_d=533.9nm$  Purity=3.7% Centroid WL:  $546.0nm$

Ratio:  $R=15.4\%$   $G=80.0\%$   $B=4.6\%$  Peak WL:  $L_p=450.0nm$  HWL:  $20.5nm$

Render Index:  $R_a=82.7$

R1 =80	R2 =87	R3 =92	R4 =83	R5 =81	R6 =83	R7 =88	
R8 =67	R9 =2	R10=70	R11=82	R12=60	R13=82	R14=96	R15=74

Photo Parameters:

Flux: 21745 lm Fe: 52.703 W Efficacy: 148.3 lm/W

WHITE: ANSI\_5700K

Electrical Parameters:

Lamp : U=222.6V I=0.5440A P=146W PF=0.9710

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]  
 REF=32343 (R=3) %=0.698%

$I_p=29682$  (G=3, D=55)  
 PMT: 26.8 centigrade [26.6]

150W





## INSTALLATION INSTRUCTIONS

1. Take the LED Temporary Work Light with hook from the package.


2. Install the hook as illustrated in Figure.

Hooks and lamps must be firmly and reliably installed.

3. Install lamp hooks on reliable hooks or walls.

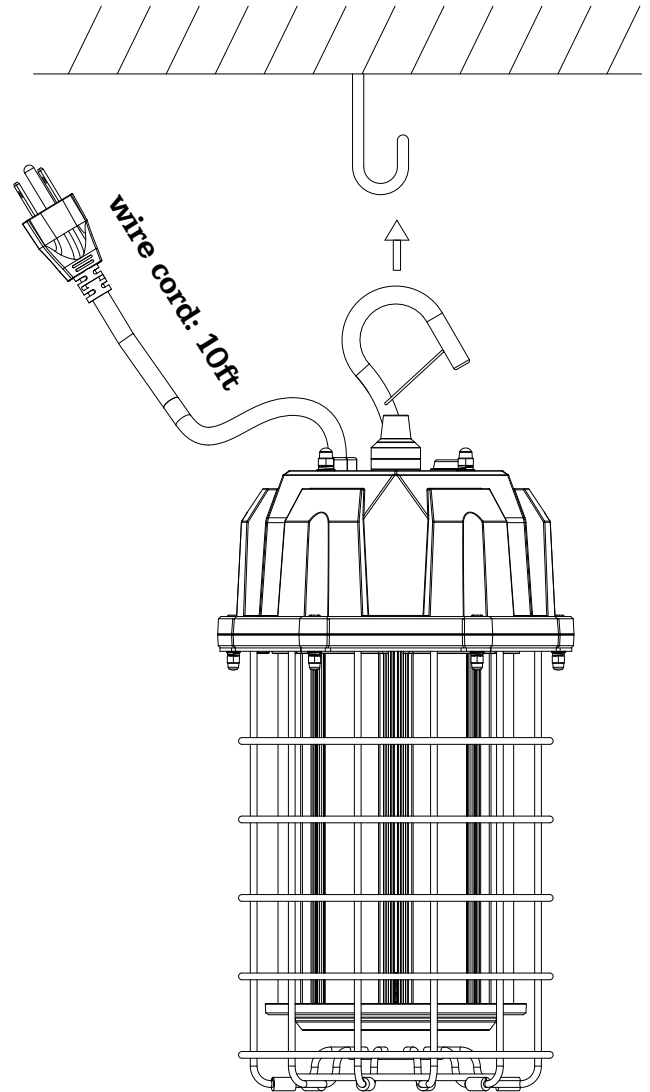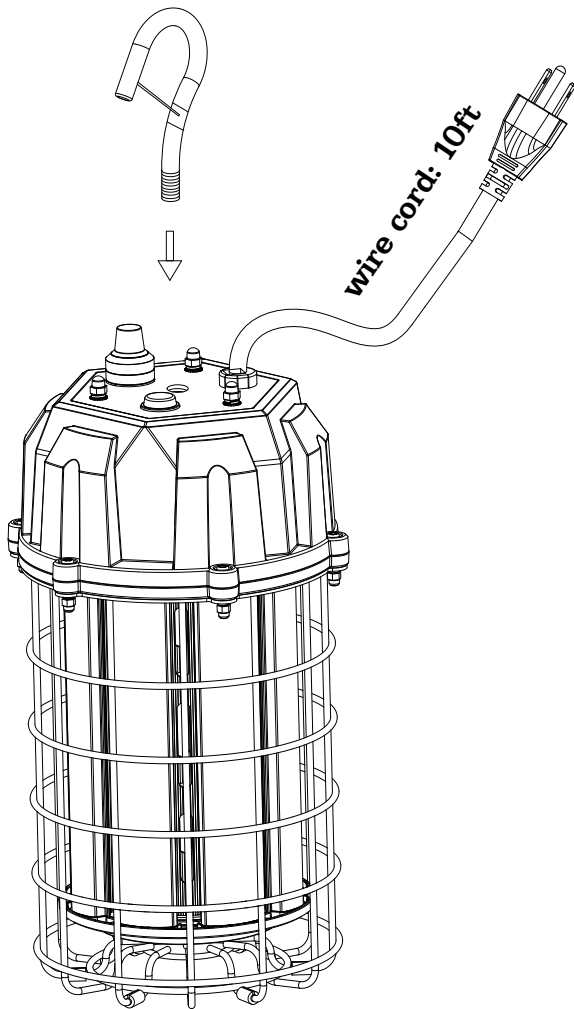

## PACKAGE

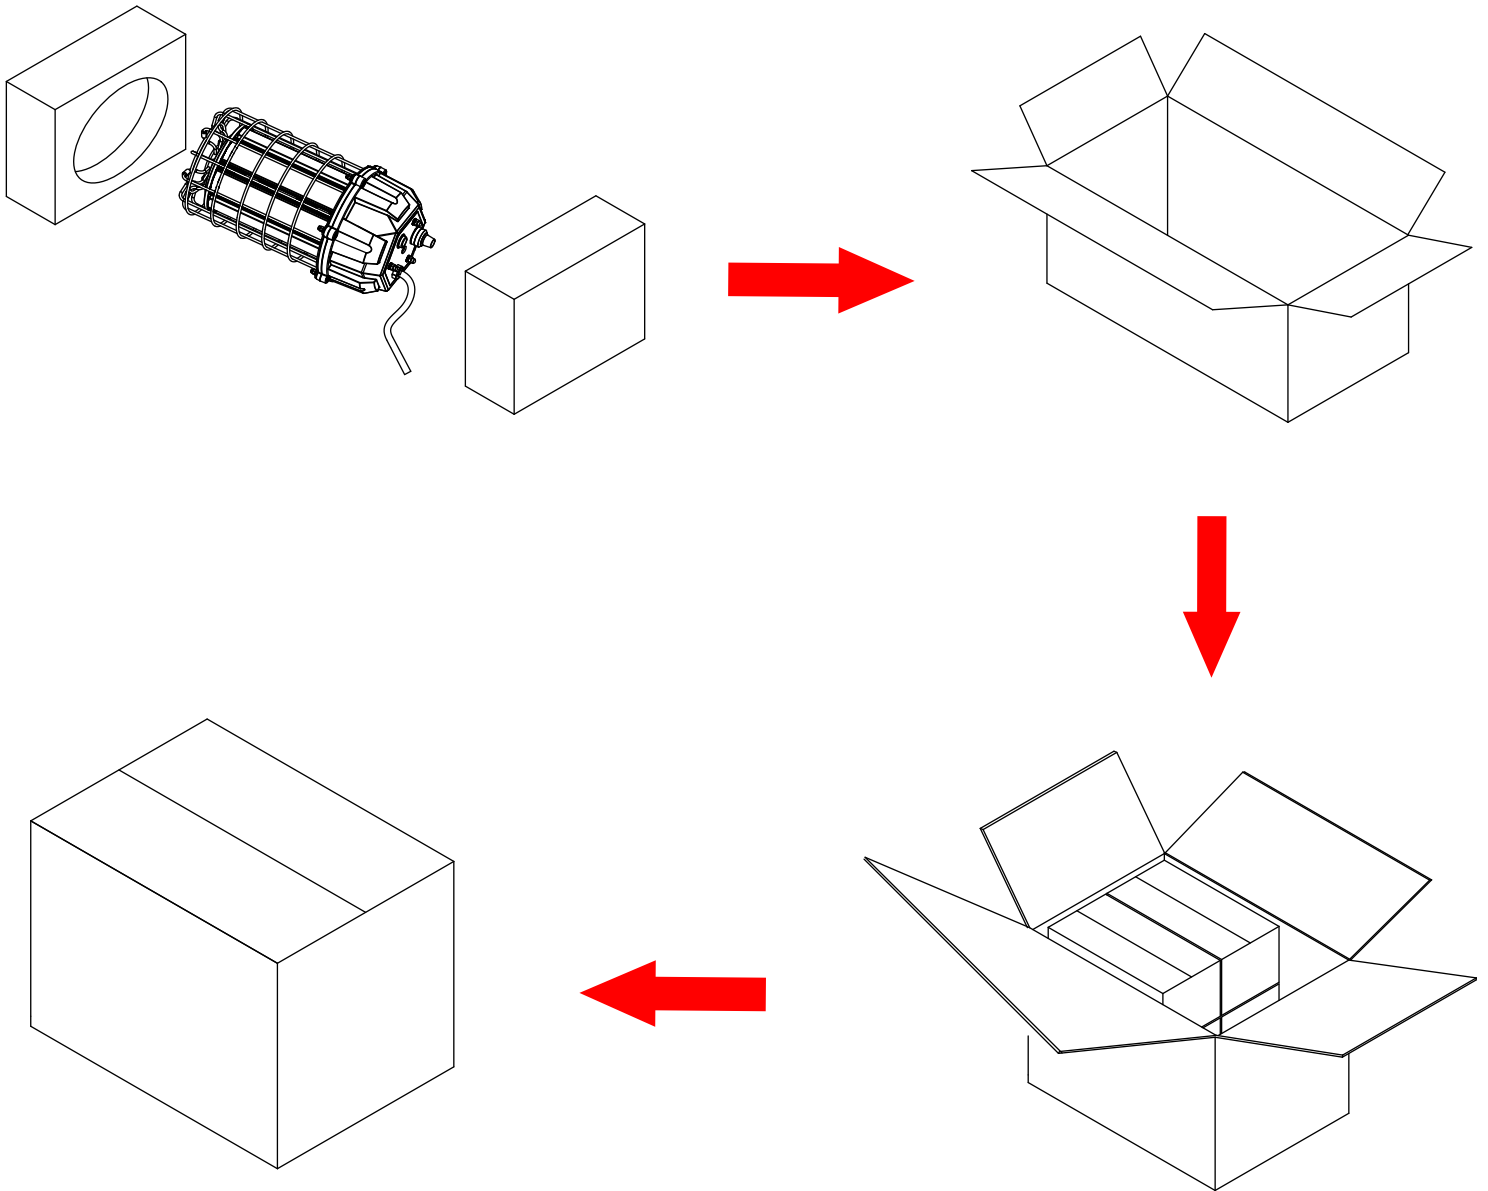

Series	Unit	Package Size	Gross weight
NG-TWL-60W NG-TWL-80W	1 Pcs	28.6*20.5*17.8CM	3 KG
	4Pcs	38*35*38 CM	12.8 KG
NG-TWL-100W NG-TWL-125W NG-TWL-150W	1Pcs	33.6*20.5*17.8CM	3.5 KG
	4Pcs	43*35*38 CM	14.8 KG

## APPLICATIONS

